


# Modernizing Legacy Codes for Next- Generation Storage Infrastructures: A Case Study of PALM on Intel DAOS

Steffen Christgau and Thomas Steinke  
Zuse Institute Berlin (ZIB)

*DAOS User Group, November 20, 2019*

# Motivation

- Evaluation of future scalable storage solutions for next-gen system architectures
  - ❖ Hardware: DCPMM + NVMe SSDs
  - ❖ Software: DAOS storage software stack
  
- DAOS with high-level libraries: netCDF, HDF5, ..., MPI (,POSIX)
  
- Start with "simple" use case: Checkpointing

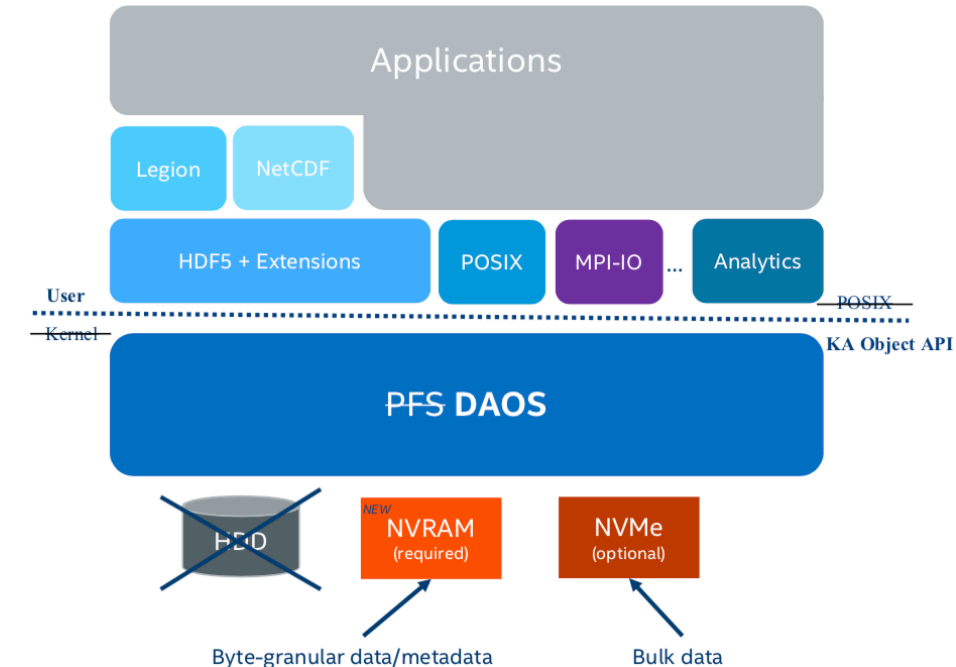


Source: A. Dilger DAOS: Scale-out Object Storage for NVRAM, Dagstuhl Workshop, May 2017

# About PALM


## Parallelized Large-Eddy Simulation Model

- Developed by IMUK @ Univ. Hannover
- Computes turbulent air-flows, solves incompressible Navier-Stokes equations
- 3D compute domain, typical dimensions  $O(1k) \times O(1k) \times O(100)$
- Fortran 2003 (95) code base, GPL
  - ❖ since 1997, 200k+ lines of code, lots of modules
- MPI/OpenMP parallelization
- large memory footprint
- netCDF for data output



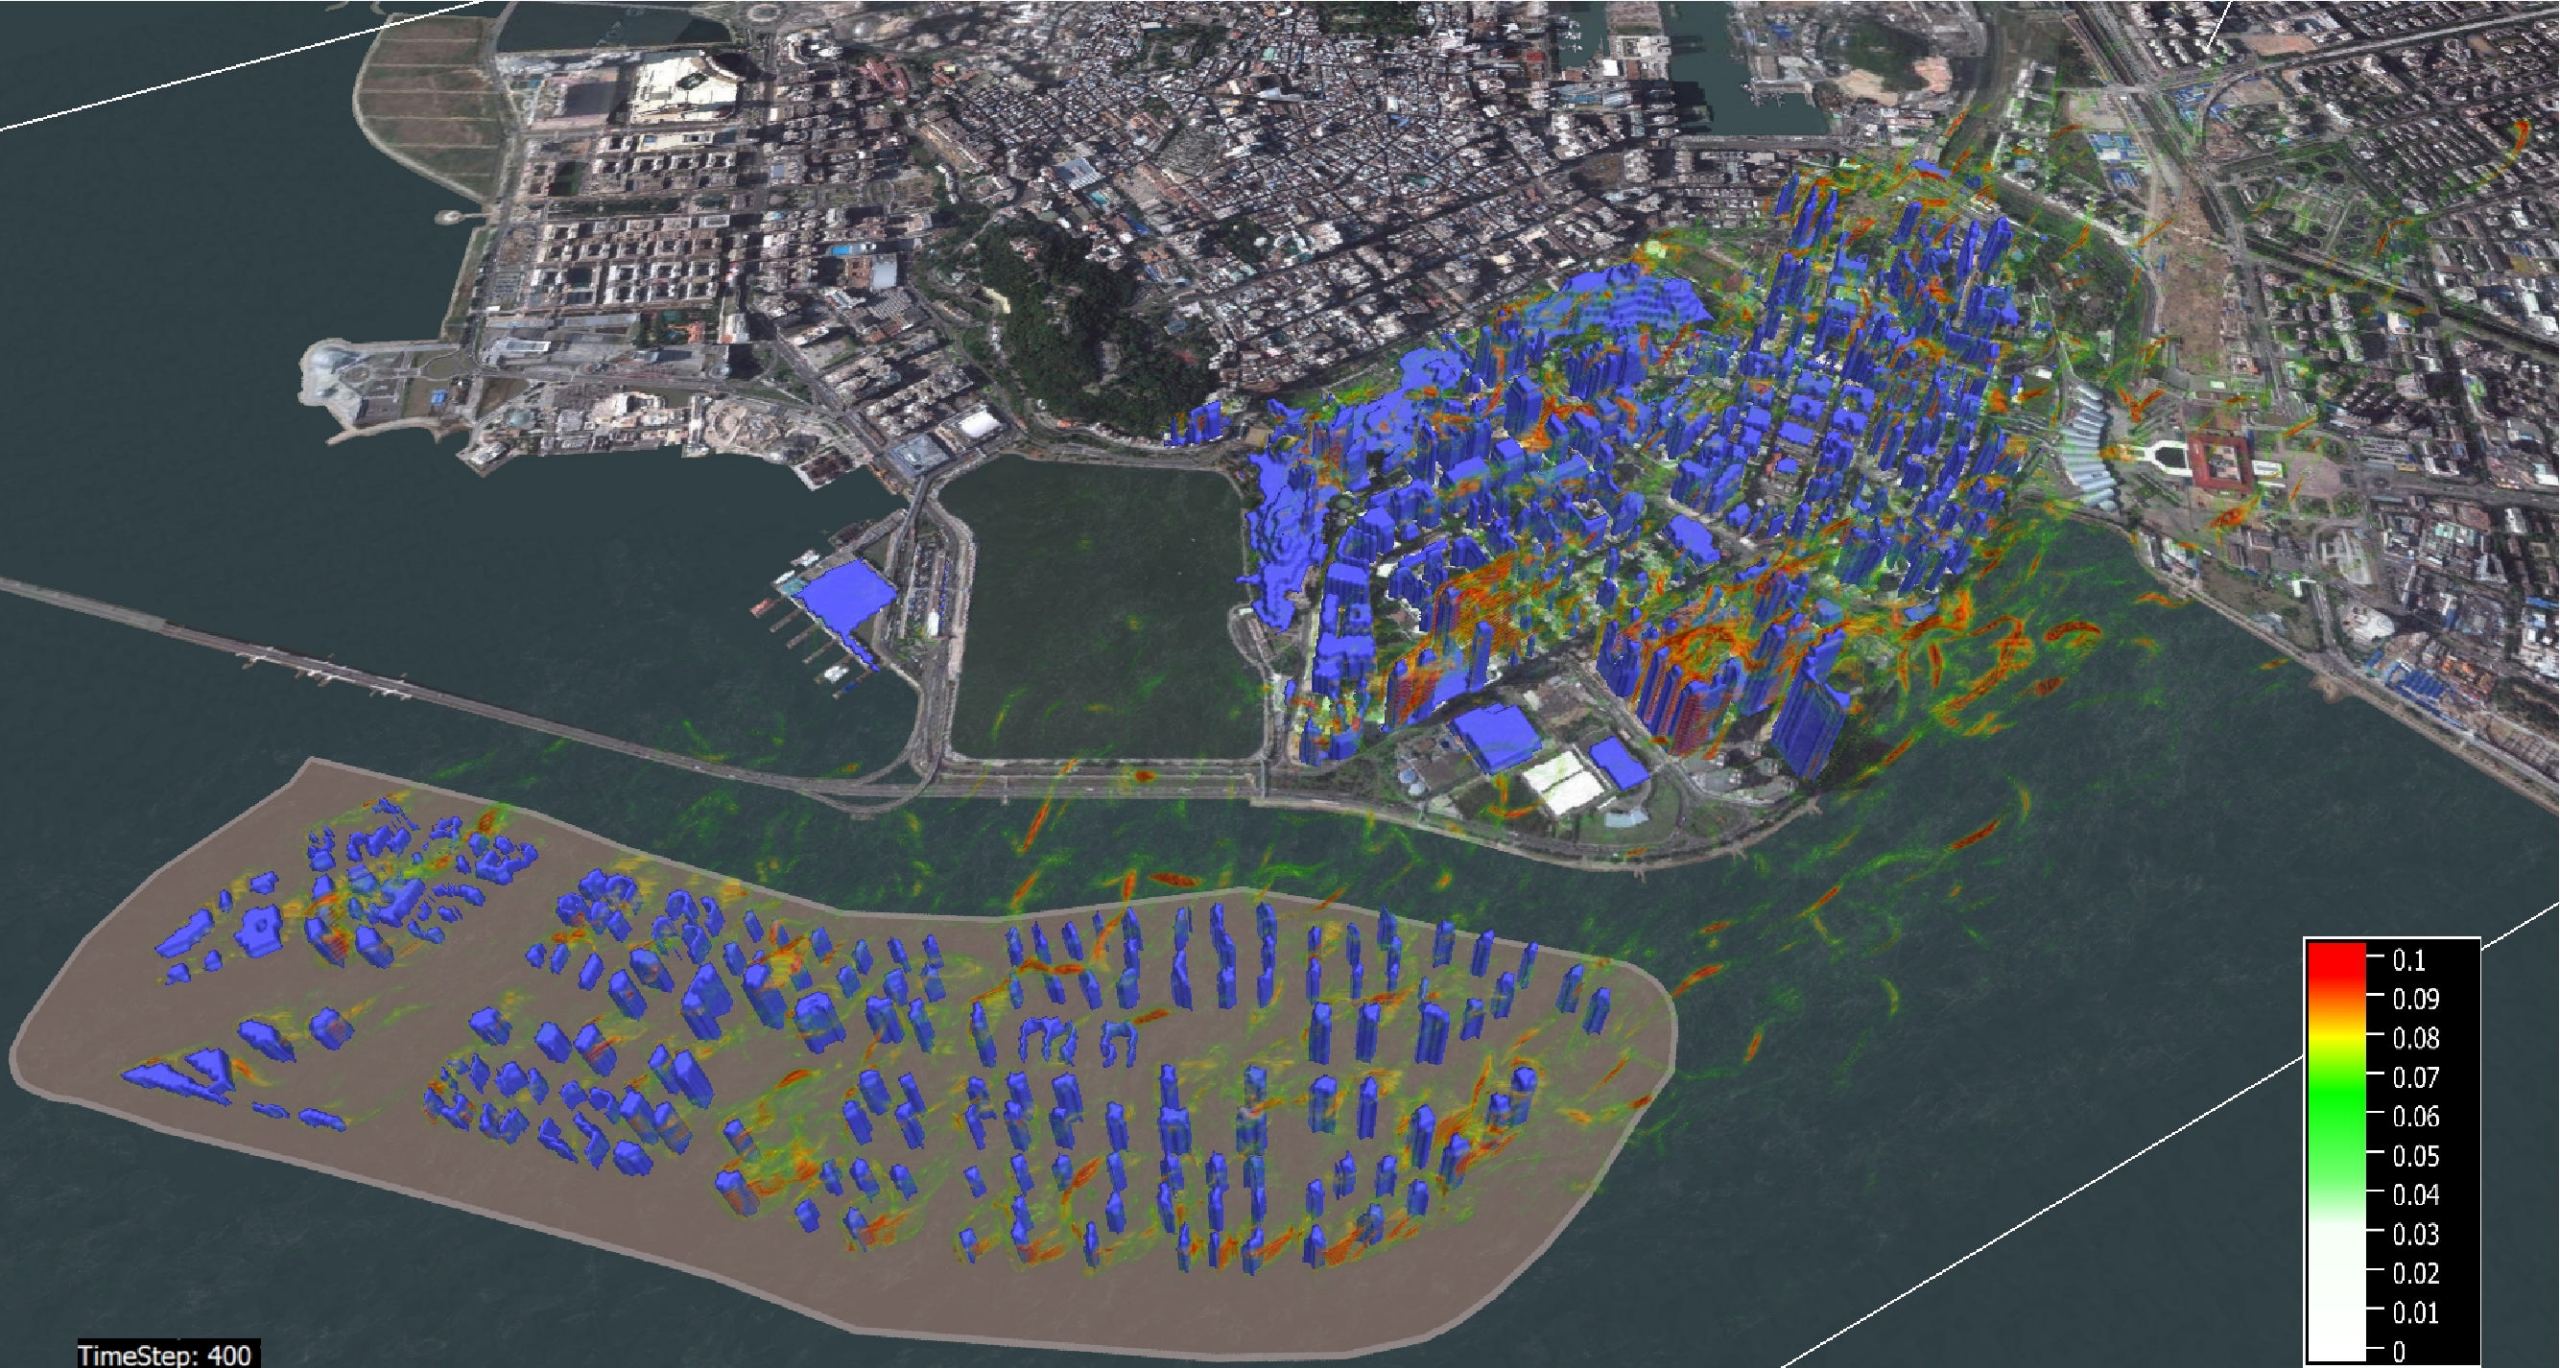

TimeStep: 400

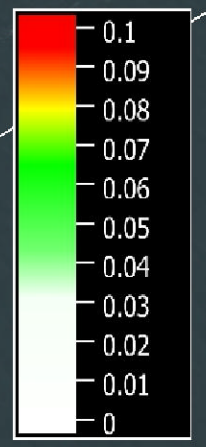



# Checkpointing in PALM: Initial Version

- Motivation: save the application state when job reaches wall time limit  
... multiple restarts in job chains
- Fortran unformatted I/O
- Checkpoint creation: write name and raw data to hard-coded unit

```
CALL wrd_write_string( 'topography' )  
WRITE ( 14 ) topography
```

- Restore: read name from other hard-coded unit + large select statement

```
SELECT CASE ( restart_string(1:length) ) ...  
CASE ( 'topography' ) READ ( 13 ) topography
```

# Checkpointing in PALM: Challenges

- Raw binary data: hard to postprocess (useful for debugging)
- Unformatted Fortran IO: "hidden" additional small writes
- One file per MPI process(!)
- Support of variable task/thread configuration  
→ PE-independence results in complicated restore code
- interface to DAOS? ... Via POSIX!?
- **no abstraction**
- **no expressed parallelism**

# Which Data are Checkpointed?

- Not all application data are written to checkpoint file(s)
- Typical composition (simplified) for  $4096 \times 4096 \times 256$  compute domain

Type	Count	Data
scalars	192	907 B
1D arrays	57	1.00 GB
2D arrays	21	1.25 GB
3D arrays	9	258.00 GB
4D arrays	1	806 KB
<b>total</b>	<b>280</b>	<b>261 GB</b>



# New Checkpointing Implementation

- Design a new checkpointing abstraction layer


```
!-- optional call to define variable  
CALL checkpoint_define('topography', topography, dt_replicated)  
CALL checkpoint_write('topography', topography, dt_replicated)  
CALL checkpoint_read('topography', topography, dt_replicated)
```

- Enables to abstract from actual storage API
  - ❖ Remove Fortran unformatted IO
  - ❖ Use of generic functions
  - ❖ Replace storage backend with modern technologies without application changes



# New Checkpointing Abstraction Layer

- Access target hardware via **high-level libraries**
  - ❖ **ROMIO**: implementation of MPI's IO chapter
  - ❖ **netCDF**: IO for named and typed arrays; self-described files, existing ecosystem
- Target hardware: **NVRAM**, via DAX or **DAOS**

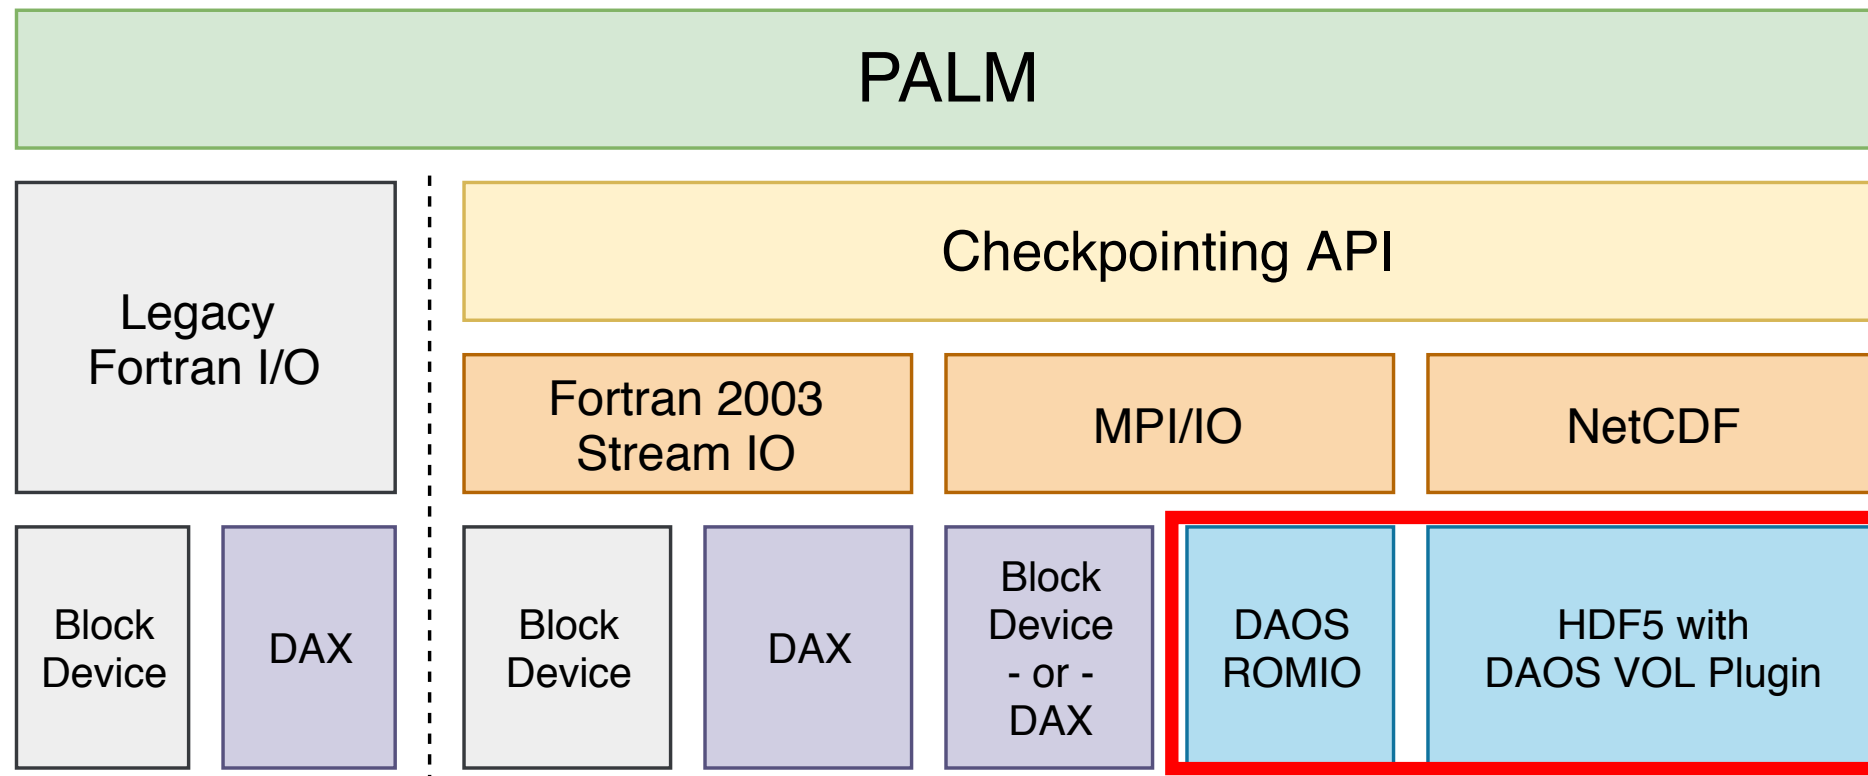

# Using NVRAM + DAOS

Motivation recap: use high level libraries to interface DAOS

## stream

- ❖ **no interface to DAOS**, maybe FUSE → not investigated
- ❖ use NVRAM via **DAX-mounted file system**

## MPI/IO



- ❖ **interfaces DAOS'** low level API
- ❖ ROMIO implementation from DAOS team, based on MPICH 3.3
- ❖ configure, make, make install and **just run your MPI IO code**
- ❖ (some intended limitations; do not apply to PALM)
- ❖ alternative: use **DAX-mounted file system**

## netCDF

- ❖ our assumption: just built netCDF on top of DAOS-aware HDF5
- ❖ HDF5 VOL plugin for DAOS is work in progress, available soon, netCDF likely to need adjustments (?)
- ❖ *DAOS v0.6 was not usable via netCDF*

# Preliminary Results: DAOS Testbed

- Single node:
  - ❖ dual Xeon Platinum 8260L (CL-SP, 24C/48T)
  - ❖ 6 TB NVRAM (2 × 6 DCPMM) + 768 GB DRAM
  - ❖ CentOS 7, gcc/gfortran 9.1
  - ❖ 32 MPI procs, domain size = 4096 × 4096 × 256
- Mimics "DAOS on every compute node" scenario (vs. burst buffer-like setup)
- Compare backend stream, MPI on DAX FS, and MPI on top of DAOS

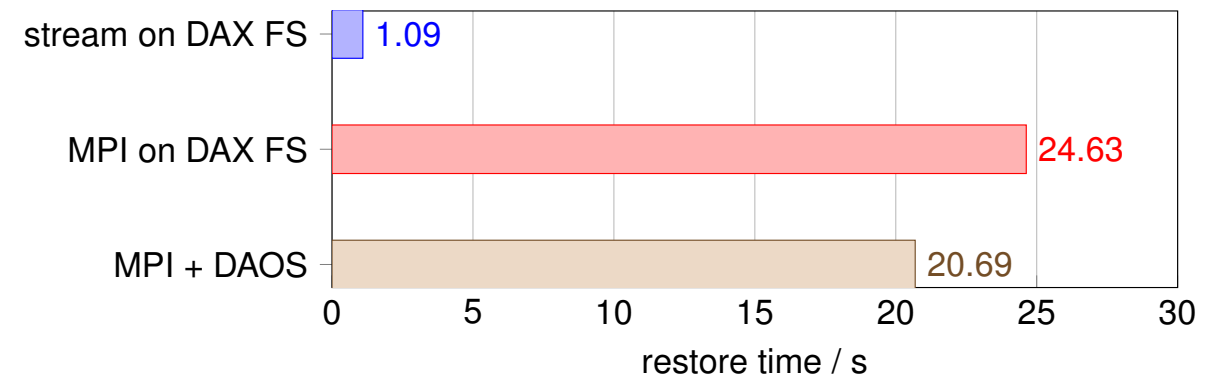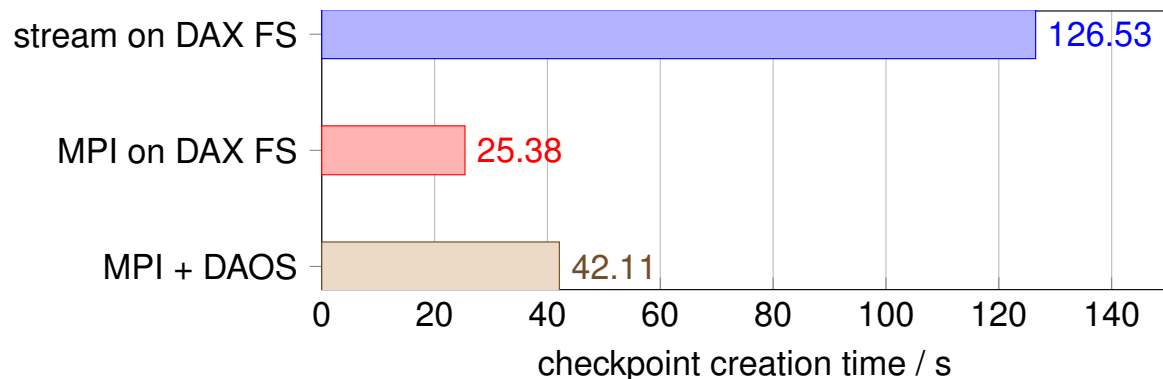

# Experiences with DAOS v0.6

- **Installation** smoothly with Scons, use "download dependencies" feature
- **Setup:**
  - ❖ currently cannot use all DCPMMs on NUMA system
  - ❖ notice immutable notes
- **Usage:**
  - ❖ `first_core` option helpful

- **Setup:** sometimes confusing configuration:
  - ❖ Values for unimplemented features in examples
  - ❖ Leave defaults where unsure
  - ❖ Sufficient to define what contributes to pool
- **Usage:**
  - ❖ Permissions: required to use DAOS account to get access to pool
  - ❖ (1+x) threads per target, i.e. DCPMM, hog CPU cores → energy consumption!?



# Summary

- Avoid raw (POSIX) IO, although it seems to be easy.
- Use established high-level libraries.
- DAOS is under heavy development! Expect some trouble, give to feedback developers!
- Early DAOS performance numbers promising but room for improvements.

**Thank You!**

Questions:

**Steffen Christgau <[christgau@zib.de](mailto:christgau@zib.de)>**